

ST-RN04 08 16N7L-CVI

4/8/16CH Tribrid HDCVI&Analog&IP 1.5U DVR



Features

Tribrid: Each channel supports HDCVI/Analog/IP Video input

1HDMI/VGA/TV simultaneous video output,1 HDMI separate output

ST-RN04 08 16N7L-CVI:All channel Max 1080P

Up to 1080p realtime live view

H.264 dual-stream video compression

4/8 channel synchronous realtime playback, GRID interface & smart search

Support Multi-brand network cameras: Saitell, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech , and etc.

3D intelligent positioning with Saitell PTZ dome camera

Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB,3 USB2.0

Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

ST-RN04 08 16N7L-CVI


Technical Specifications

Model		ST-RN04N7L-CVI	ST-RN08N7L-CVI	ST-RN16N7L-CVI
System				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
Video				
Input		4 channel	8 channel	16 channel
Video Standard	HDCVI	1080P/720P HDCVI Camera		
	Analog	NTSC(525Line, 60f/s), PAL(625Line, 50f/s), Effio 960H Camera		
	IP	1080P/720P/D1/CIF IP Camera		
Audio				
Input		4 channel, BNC		
Output		1 channel, BNC		
Two-way Talk		1 channel input, 1 channel output, BNC		
Display				
Interface		2 HDMI, 1 VGA, 1 TV		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768, 800×600		
Display Split		1/4	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264/G.711		
Resolution		1080P(1920×1080)/720P(1280×720)/960H(960×576/960×480)/D1/4CIF(704×576/704×480)/CIF(352×288/352×240)/QCIF(176×144/176×120)		
Record Rate	Main Stream:	1080P/720P/960H/D1/HD1/2CIF/CIF(1~25/30fps)		
	Extra Stream	CIF/QCIF(1~25/30fps)		
Bit Rate		48~8192Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm				
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input		4 channel	8 channel	16 channel
Relay Output		6 channel		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)		

ST-RN04 08 16N7L-CVI

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/eSATA Device/Internal SATA burner/Network
Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	4 SATA ports, up to 16TB
External HDD	1 eSATA port, up to 16TB
Auxiliary Interface	
USB Interface	3 ports(2 Rear),USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port RS485 for PTZ control,1 port RS422 for Keyboard
General	
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	40W(without HDD)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimension(W×D×H)	1.5U, 440mm×410mm×70mm
Weight	6KG(without HDD)

System Connection

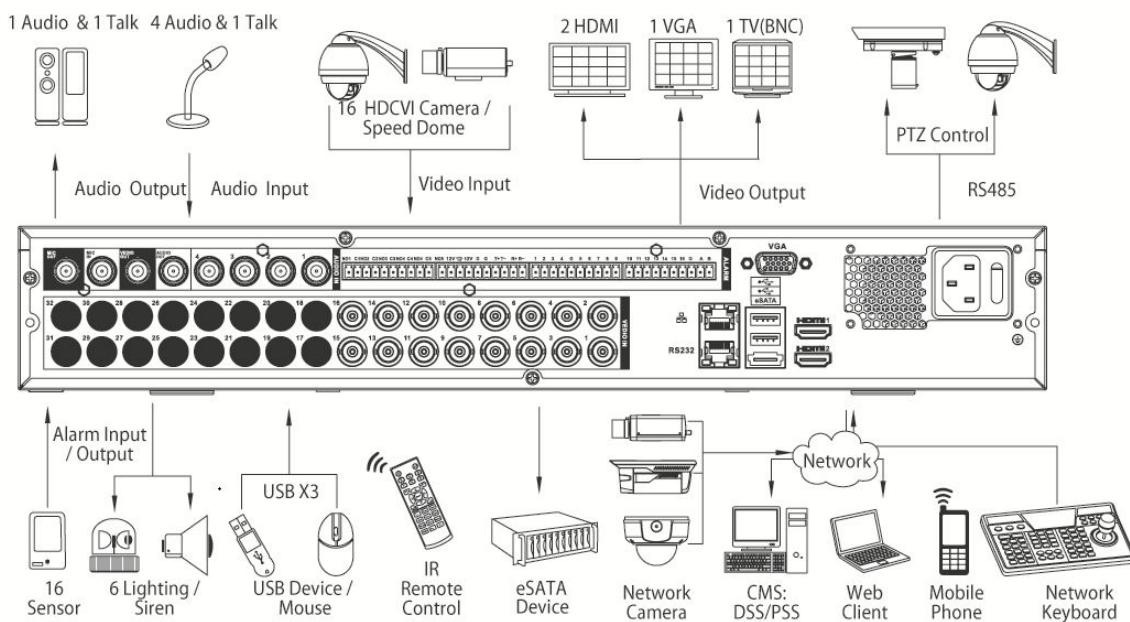

*Takes ST-RN16N7L-CVI as an example

ST-RN04 08 16N7L-CVI

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China

Tel: +86-755-22318209

Fax: +86-755-22318205

Email: sales@saitell.com

www.saitell.com

*Design and specifications are subject to change without notice.

© 2014 Saitell Technology Co., Ltd.